

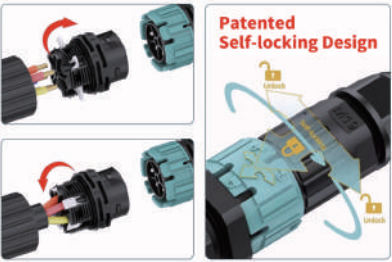


IP68 Waterproof Connector



Screw Free



Options

Number of Poles	 4Pin	 5Pin
Seal ring		
Cable range	5~9mm	9~12mm
Stripping length	10~13 mm	

EW-P25MF-XP

Male & Female Self-locking Screwless Fast Wiring Connector
(X can be 4/5, denoting the number of poles)

Wiring Method:

Screwless fast wiring

Housing Material: PA66

Seal Ring Material: Silicone Rubber

Terminal Material: Copper alloy

IP Rating: IP68

Fire Rating: V0

Rated Voltage: 450V

Rated Current: 16A

Wire Section: 0.5~2.5mm²

Outer Cable Diameter: 5-9mm, 9-12mm, 10-14mm

Pluggable Life: 1,500 times

Ambient Temperature: -40°C~105°C

Warranty: 3 Years

Packaging

Export Carton (L*W*H): 42*30*34cm

Quantity: 25pcs / PE PACK (Male & Female packed separately)

200 sets / CTN

Gross Weight: EW-P25MF-4P --- 14.5KGs

EW-P25MF-5P --- 14.9KGs



Installation Illustration

