


IP68 Waterproof Connector



Patented Self-locking Design

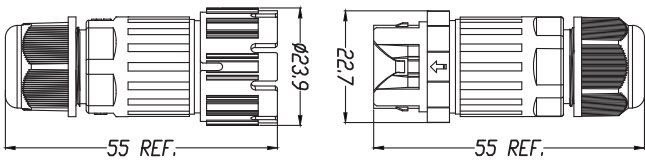

Options

Number of Poles	2Pin	3Pin	4Pin	5Pin
Seal ring				
Cable range	3.5~7mm		7~10mm	
Stripping length	6~7mm			

EW-M19MF-XP

Male & Female Self-locking Screwless Fast Wiring Connector
(X can be 2/3/4/5, denoting the number of poles)

Wiring methods:

Welding connection: Suitable for 2/3/4/5 pins

Screw connection: Suitable for 2/3 pins

Housing Material: PA66

Seal Ring Material: Silicone Rubber

Terminal Material: Copper alloy

IP Rating: IP68

Fire Rating: UL94 V-0

Rated Voltage: 450V

Rated Current: 2/3Pin: 20A; 4/5Pin: 16A

Wire Section: 2/3Pin: 0.5~2.5mm²; 4/5Pin: 0.5~1.5mm²

Outer Cable Diameter: 3.5-7mm, 7-10mm

Pluggable Life: 1,500 times

Ambient Temperature: -40°C~105°C

Warranty: 3 Years

Packaging

Export Carton (L*W*H): 42*30*26cm

Quantity: 100pcs / PE PACK (Male & Female packed separately)

500pcs / CTN

Gross Weight: EW-M19MF-2P --- 17.5KGs

EW-M19MF-3P --- 18KGs

EW-M19MF-4P --- 18.5KGs



Installation Illustration

