


IP68 Waterproof Connector

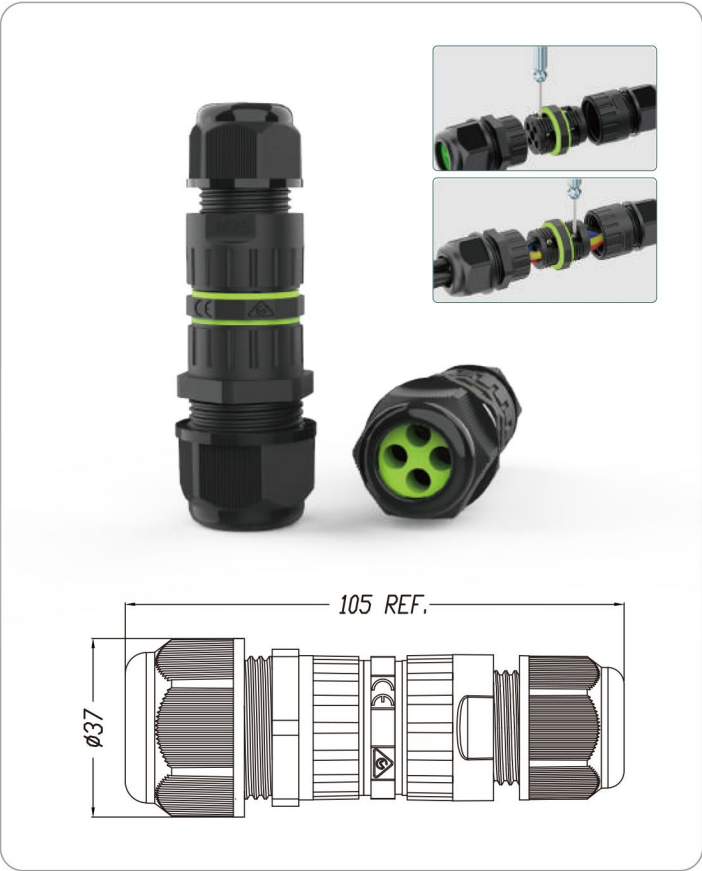

Options

Number of Poles	 2Pin	 3Pin	 4Pin	 5Pin
Seal ring				
Cable range	5~9mm	9~12mm	10~14mm	14~18mm
Stripping length	8~10 mm			

EW-M25-3T/4T/5T

(X can be 2/3/4/5, denoting the number of poles)

Wiring methods:

Screw wiring

Housing Material: PA66

Seal Ring Material: Silicone Rubber

Terminal Material: Copper alloy

IP Rating: IP68

Fire Rating: UL94 V-0

Rated Voltage: 400V

Rated Current: 2-4Pin: 41A; 5Pin: 24A

Wire Section: 2-4Pin: 0.5~6mm²; 5Pin: 0.5~2.5mm²

Outer Cable Diameter: 5-9mm, 9-12mm, 10-14mm, 14-18mm

Ambient Temperature: -40°C~105°C

Warranty: 3 Years

Packaging

Export Carton (L*W*H): 42*30*34cm

Quantity: 30pcs / PE PACK

300pcs / CTN

Gross Weight: 21.4KGs



Installation Illustration

